

M611

Quad Gigabit Ethernet XMC



Embedded Computing
without Compromise



- Single-Width XMC
- Four Gigabit Ethernet Ports, several standard configuration options
 - ▶ 4 x 10/100/1000Base-T Ports at P16, P14, or Front Panel RJ45 connectors
 - ▶ 4 x 1000Base-BX/KX (SerDes) Ports at P16
- Intel Quad GbE Controller
- PCIe x4 Gen2 Host Interface
- Hardware Checksum Offload
- IEEE 1588 Precision Time Protocol
- 9.5 kB Jumbo Frames
- Flow Control
- Powered by Single +3.3 V Supply
- Low Cost and Low Power Consumption
- Windows[®], Linux[®], VxWorks[®], INTEGRITY[®] Support
- Conduction and Air-Cooled Versions
- Vibration and Shock Resistant




M611

Quad Gigabit Ethernet XMC



Embedded Computing
without Compromise

Aitech's M611 is a high-performance Gigabit Ethernet XMC for embedded harsh environment applications. The M611 is based on the Intel I350 Quad-Port Gigabit Ethernet controller, which also provides the M611 PCIe x4 Gen2 host interface. The M611 supports both copper (10/100/1000Base-T) and SerDes (1000Base-BX/KX) physical interfaces, and can be used on a variety of platforms, under common operating systems.

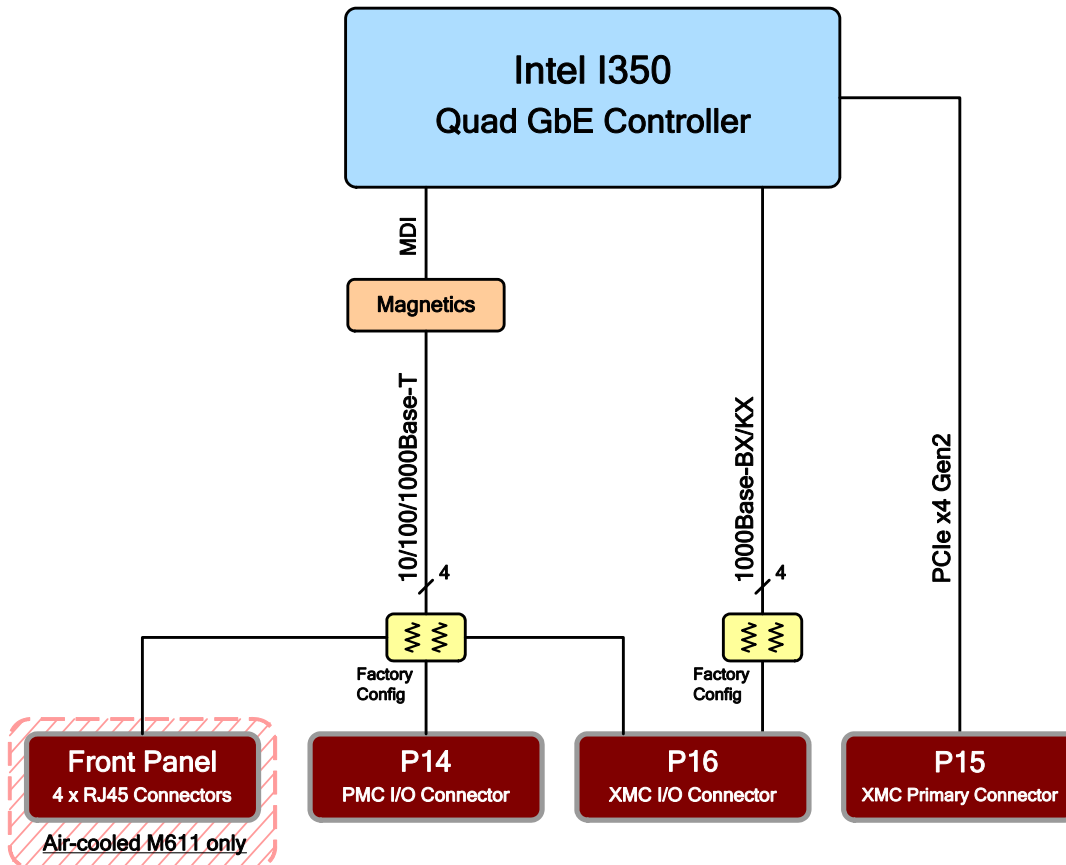

Board Architecture

GbE Controller	<p>Intel I350 Quad-Port Gigabit Ethernet Controller</p> <ul style="list-style-type: none">• IEEE 802.3x Flow Control• 9.5 kB Jumbo Frame support• Checksum offloading capabilities• TCP/UDP segmentation• PXE client support• Supports both IPv4 and IPv6• IEEE 1588 Precision Time Protocol• IEEE 802.1q VLAN support• Supports half & full duplex at 10/100 Mb/s, full duplex at 1000 Mb/s• Large on-chip Tx and Rx FIFO buffers• Optimized Tx and Rx queues• Caches up to 64 packet descriptors (per queue)• 8 Tx and 8 Rx queues per port• Wide, pipelined internal data path architecture• Descriptor ring management hardware for Tx and Rx• Optimized descriptor fetching and write-back mechanisms
Ethernet Interfaces	<p>Each port factory configured as 1000Base-T or 1000Base-BX/KX (SerDes), routed by factory configuration to P16, P14, or front panel connectors. See <i>Standard Configurations</i> below.</p> <ul style="list-style-type: none">• 10/100/1000Base-T ports with IEEE 802.3ab compliant and compatible PHYs, on-board GbE magnetics, and auto-negotiation and auto cross-over (MDI/MDI-X) support• 1000Base-BX/KX ports support backplane applications and external SFP modules
Host Interface	<p>PCIe x4 port at P15 supports Gen2 and Gen1 speeds and port widths of x4/x2/x1</p>

M611

Quad Gigabit Ethernet XMC



Embedded Computing
without Compromise

Software

Operating Systems Microsoft Windows®, Linux®, Wind River VxWorks®, and Green Hills INTEGRITY® are supported

Mechanical

	Form Factor & Dimensions	Weight
Air-Cooled	Single-Width XMC per ANSI/VITA 42.0	< 120 g [0.27 lbs]
Conduction-Cooled	Single-Width XMC per ANSI/VITA 42.0	< 110 g [0.25 lbs]

Power

	+3.3 V	Total ⁽³⁾
Typical ⁽¹⁾	1 A	3.3 W
Maximum ⁽²⁾	1.5 A	5.0 W

Notes: (1) Only 2 (SerDes or copper) channels used (3) M611 is powered by the host +3.3 V supply; VPWR, ±12V, and +3.3V_AUX are not required
(2) 4 copper channels active

Environmental

Specs per VITA 47	Air-Cooled			Conduction-Cooled	
	Commercial	Rugged	Military	Rugged	Military
Operating Temp.	AC1 (0 to +55 °C) ⁽²⁾	AC3 (-40 to +70 °C) ⁽²⁾	AC4 (-40 to +85 °C) ^(1,2)	CC3 (-40 to +70 °C) ⁽³⁾	CC4 (-40 to +85 °C) ^(1,3)
Non-Operating Temp.	C1 (-40 to +85 °C)	C3 (-50 to +100 °C)	C4 (-55 to +125 °C)	C3 (-50 to +100 °C)	C4 (-55 to +125 °C)
Vibration	V1	V2	V2	V3	V3
Operating Shock	OS1	OS1	OS1	OS2	OS2
Altitude	15,000 ft.	35,000 ft.	70,000 ft.	35,000 ft.	70,000 ft.
Relative Humidity ⁽⁴⁾	0 - 90%	0 - 95% with Acrylic (Standard),			
Conformal Coating	N/A	0 - 100% with Urethane (Optional)			

Notes: (1) -55 °C available, contact an Aitech representative for more information (3) Operating card edge temperature
(2) Operating ambient air temperature (with sufficient airflow) (4) Non-condensing

Standard Configurations

Variant	Cooling	Ethernet Ports	I/O Routing
A50	Air	4 x 1000Base-T	Front panel RJ45 connectors
R41	Conduction	4 x 1000Base-BX/KX	P16 XMC I/O connector
R51	Conduction	4 x 1000Base-T	P16 XMC I/O connector
R52	Conduction	4 x 1000Base-T	P14 PMC I/O connector

Note: Additional port configuration/routing options may be available per customer request, contact an Aitech representative for more information


M611

Quad Gigabit Ethernet XMC



Embedded Computing
without Compromise

Ordering Information

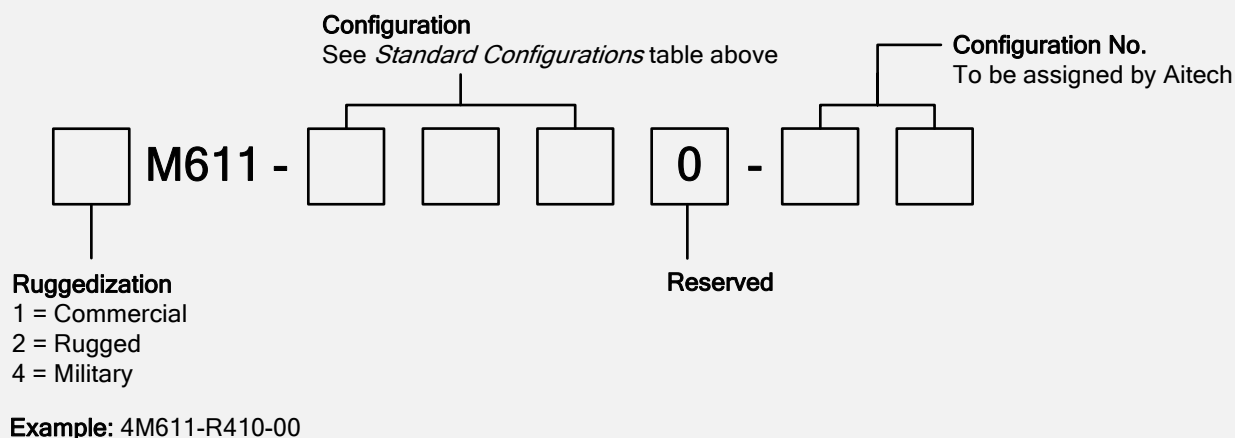

Contact Aitech

Contact your Aitech sales representative for additional product information, and for inquiries regarding customized configurations of the M611 and additional software support.



All names, products, and/or services mentioned are trademarks or registered trademarks of their respective holders. All information contained herein is subject to change without notice.