

# IGS-1050A/1041GPA



IGS-1050A



IGS-1041GPA

## ➤ Industrial 5-port slim type unmanaged Gigabit Ethernet switch

### Features

- Each unit supports 5 x 10/100/1000Base-T(X) ports or 4 x 10/100/1000Base-T(X) and 1 x 1000Base-X SFP ports
- Support Jumbo frame up to 9K Bytes
- Hardware DIP switch to enable/disable warning function
- Rigid IP-30 slim type housing design
- DIN-Rail and wall mounting enabled
- Relay output to carry capacity of 1A at 24VDC



### Introduction


IGS-1050A/IGS-1041GPA series are unmanaged gigabit Ethernet switches with 5 x 10/100/1000Base-T(X) ports or 4 x 10/100/1000Base-T(X) and 1 x 1000Base-X SFP ports. IGS-1050A/IGS-1041GPA series support redundant power inputs, rigid IP-30 housing and have DIP switches for enabling or disabling relay output alarm. In addition, the wide operating temperature range from -40 to 70°C can satisfy most of operating environment.

### Practical Operation

IGS-1050A/IGS-1041GPA can be used in connecting several Ethernet devices like Ethernet I/O, IP-Camera or other Ethernet switches. In addition, there are two different power inputs at terminal block to avoid interruption caused by power down. When the primary DC power input fails, the backup power input will take over immediately to guarantee a non-stop operation.



## Dimensions

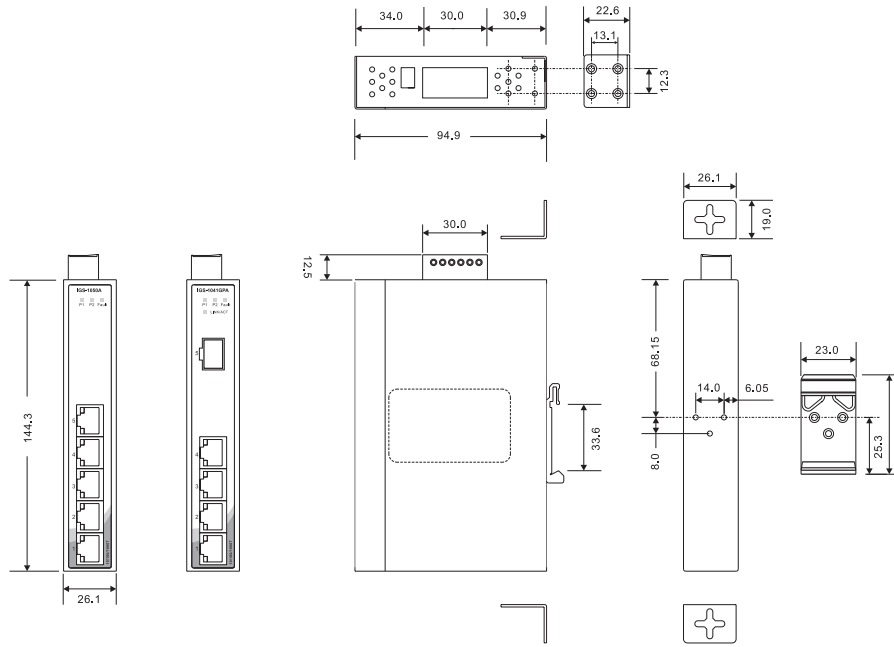

(Unit=mm)

## Specifications

ORing Switch Model	IGS-1050A	IGS-1041GPA
<b>Physical Ports</b>		
10/100/1000Base-T(X) Ports in RJ45 Auto MDI/MDIX	5	4
1000Base-X SFP Ports	-	1
<b>Technology</b>		
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3z for 1000Base-X IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control	
MAC Table	1024 MAC addresses	
Processing	Store-and-Forward	
Jumbo Frame	9K	
<b>LED Indicators</b>		
Power Indicator	Green : Power LED x 2	
Fault Indicator	Amber : Indicates PWR1 or PWR2 failure occurred	
10/100/1000Base-T(X) RJ45 Port Indicator	Green for port Link / Act Amber for 100Mbps indicator	
1000Base-X SFP Port Indicator	-	Green for port Link/Act
<b>Fault contact</b>		
Relay	Relay output to carry capacity of 1A at 24VDC	

Power	
Redundant Input Power	Dual DC inputs. 12~48VDC on 6-pin terminal block.
Power Consumption (Typ.)	5.5 Watts
Overload Current Protection	Present
Reverse Polarity Protection	Present
Physical Characteristics	
Enclosure	IP-30
Dimensions (W x D x H)	26.1(W) x 94.9(D) x 144.3(H) mm ( 1.03x3.74x5.68 inch.)
Weight (g)	420g 403g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 70°C (-40 to 158°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
Warranty	5 years

### Ordering Information

IGS-1 **AA** **B** **CC** **A**

Code Definition	10/100/1000Base-T(X) Port Number	Additional Port Number	Additional Port Type
<b>Option</b>	- <b>04</b> : 4 ports - <b>05</b> : 5 ports	- <b>0</b> : 0 ports - <b>1</b> : 1 ports	- <b>GP</b> : 1000Base-X in SFP

	Model Name	Description
Available Model	IGS-1050A	Industrial 5-port slim type unmanaged Gigabit Ethernet switch with 5x10/100/1000Base-T(X)
	IGS-1041GPA	Industrial 5-port slim type unmanaged Gigabit Ethernet switch with 4x10/100/1000Base-T(X) and 1x1000Base-X, SFP socket

**Packing List**

- IGS-1050A / 1041GPA
- DIN-Rail Kit
- Wall-mount Kit
- Quick Installation Guide

**Optional Accessories (Can be purchased separately)**

- SFP1G series, 1Gbps SFP optical transceiver (for IGS-1041GPA only)
- DR-45 series, 45W DIN-Rail power supply
- DR-75 series, 75W DIN-Rail power supply
- DR-120 series, 120W DIN-Rail power supply
- SDR-240-48, 240W DIN-Rail power supply
- SDR-480-48, 480W DIN-Rail power supply



#### **Stockholm HQ**

Sensor Control Nordic AB  
Truckvägen 16B  
194 52 Upplands Väsby  
Phone number: +46 8-668 21 00

#### **Malmö**

Sensor Control Nordic Syd  
Rönneviksgatan 13  
213 74 Malmö  
Phone number: +46 40 -688 02 00

#### **Umeå**

Sensor Control Nordic Norr  
Umestans Företagspark  
903 47 Umeå  
Phone number: +46 90-969 71

[info@scn.se](mailto:info@scn.se)  
[www.scn.se](http://www.scn.se)



#### **Helsinki**

Sensor Control Nordic AB  
Teknobulevardi 3-5  
FI-01530 Vantaa, FINLAND  
Phone number: +358 20  
7348600

[info@scnnordic.fi](mailto:info@scnnordic.fi)  
[www.scnnordic.fi](http://www.scnnordic.fi)

#### **Tallinn**

Sensor Control Nordic AB  
Narva mnt 5  
10117 Tallinn, ESTONIA  
Phone number: +372  
6514550

[info@scn.ee](mailto:info@scn.ee)  
[www.scn.ee](http://www.scn.ee)

Connect with us on social media!

