

IGS-1080A



IGS-1080A

➤ **Industrial 8-port slim type unmanaged Gigabit Ethernet switch with 8x10/100/1000Base-T(X)**

Features

- Supports auto-negotiation and auto-MDI/MDI-X
- Supports Jumbo Frame up to 9K Bytes
- Relay output for carrying capacity of 1A at 24 VDC
- Supports store-and-forward transmission
- Supports flow control
- Hardware DIP switch for enabling/disabling the warning function
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled



Introduction


IGS-1080A is the slim type unmanaged gigabit Ethernet switch with 8 x 10/100/1000Base-T(X) ports. IGS-1080A supports redundant power input, rigid IP-30 housing, plus DIP switches for enabling or disabling relay output alarm. In addition, the wide operating temperature range from -40°C to 70°C can satisfy most of operating environments.

Practical Operation

IGS-1080A can be used in connecting several Ethernet devices such as Ethernet I/O, IP-Camera or other Ethernet switches. In addition, there are two different power inputs at terminal block to avoid interruption caused by power down. When the primary DC power input fails, the backup power input will take over immediately to guarantee a non-stop operation.



Dimensions

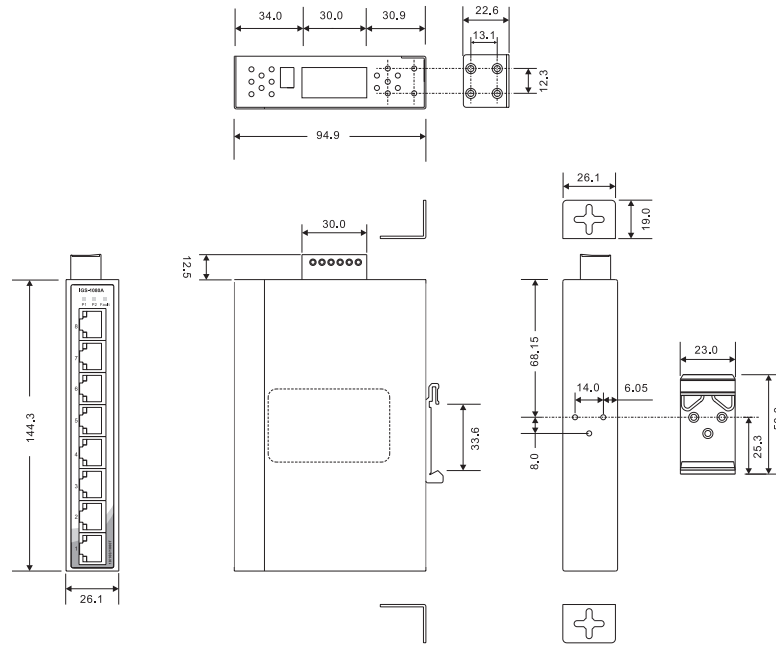

(Unit=mm)

Specifications

ORing Switch Model	IGS-1080A
Physical Ports	
10/100/1000Base-T(X) Ports in RJ45 Auto MDI/MDIX	8
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control
MAC Table	2048 MAC addresses
Processing	Store-and-Forward
LED Indicators	
Power Indicator	Green : Power LED x 2
Fault Indicator	Amber : Indicates PWR1 or PWR2 failure
10/100/1000Base-T(X) RJ45 Port Indicator	Green for port Link / Act Amber for 100Mbps indicator
DIP Switch	
DIP-Switch 1	Power-1 failed warning : (ON) enable, (OFF) disable
DIP-Switch 2	Power-2 failed warning : (ON) enable, (OFF) disable
Fault contact	
Relay	Relay output to carry capacity of 1A at 24VDC
Power	
Redundant Input Power	Dual DC inputs. 12~48 VDC on 6-pin terminal block.
Power Consumption (Typ.)	7 Watts
Overload Current Protection	Present
Reverse Polarity Protection	Present

Physical Characteristics	
Enclosure	IP-30
Dimensions (W x D x H)	26.1(W) x 94.9(D) x 144.3(H) mm (1.03x3.74x5.68 inch.)
Weight (g)	375g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 70°C (-40 to 158°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
Warranty	5 years

Ordering Information

IGS-1 **AA** **B** **A**

Code Definition	10/100/1000Base-T(X) Port Number	Additional Port Number
Option	- 08 : 8 ports	- 0 : 0 ports

Available Model	Model Name	Description
	IGS-1080A	Industrial 8-port slim type unmanaged Gigabit Ethernet switch with 8 x 10/100/1000Base-T(X)

Packing List

- IGS-1080A
- DIN-Rail Kit
- Wall-mount Kit
- Quick Installation Guide

Optional Accessories (Can be purchased separately)

- DR-45 series, 45W DIN-Rail power supply
- DR-75 series, 75W DIN-Rail power supply
- DR-120 series, 120W DIN-Rail power supply
- SDR-240-48, 240W DIN-Rail power supply
- SDR-480-48, 480W DIN-Rail power supply



Stockholm HQ

Sensor Control Nordic AB
Truckvägen 16B
194 52 Upplands Väsby
Phone number: +46 8-668 21 00

Malmö

Sensor Control Nordic Syd
Rönneviksgatan 13
213 74 Malmö
Phone number: +46 40 -688 02 00

Umeå

Sensor Control Nordic Norr
Umestans Företagspark
903 47 Umeå
Phone number: +46 90-969 71

info@scn.se
www.scn.se



Helsinki

Sensor Control Nordic AB
Teknobulevardi 3-5
FI-01530 Vantaa, FINLAND
Phone number: +358 20
7348600

info@scnnordic.fi
www.scnnordic.fi

Tallinn

Sensor Control Nordic AB
Narva mnt 5
10117 Tallinn, ESTONIA
Phone number: +372
6514550

info@scn.ee
www.scn.ee

Connect with us on social media!

