



MARK	CONTENT OF AMENDMENT	DATE	DRAW



This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2020 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

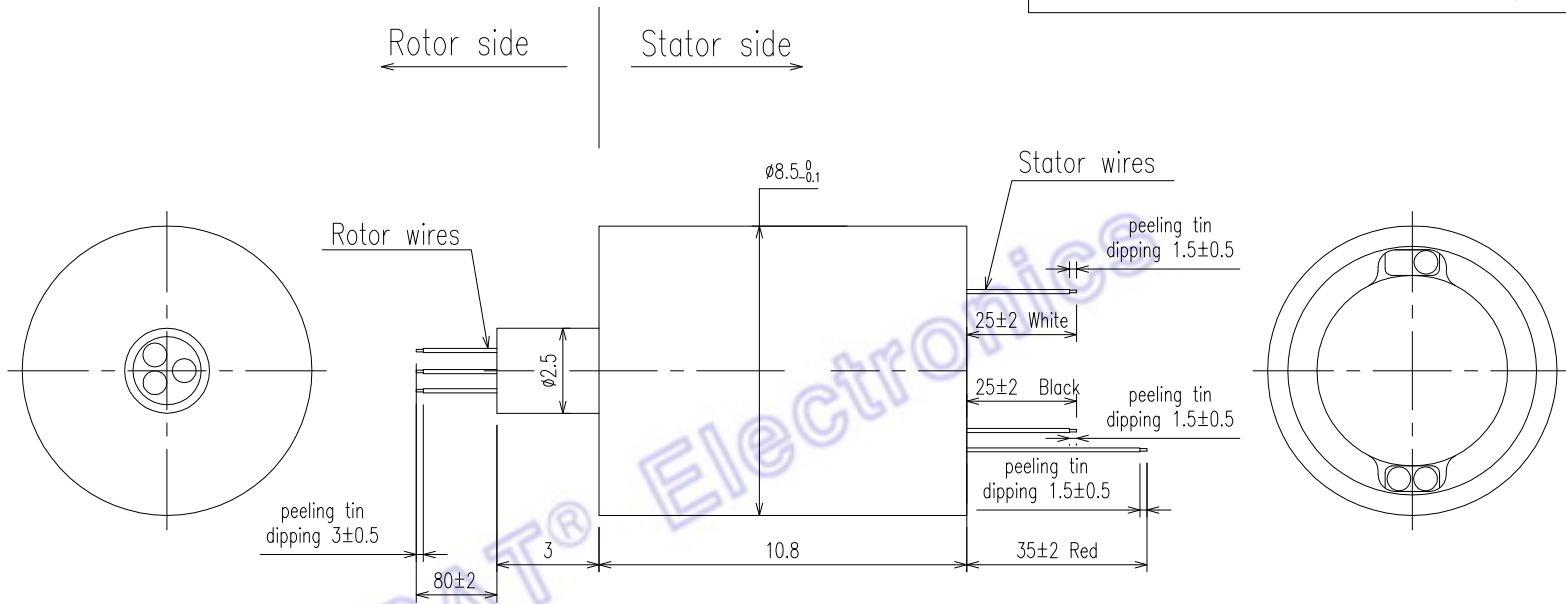

Wiring Diagram



Electronic & Electric		Mechanical		
Circuits	Total	3 CKT	Working Speed	0~300rpm
	Detail	3x1A		Contact Material
Rating Voltage	0~6VDC	Housing Material	Engineering plastics	
Dynamic Resistance Fluctuation Value	$\leq 35m\Omega$	Lead Wire Length	Rotor side: 80mm Stator side: 25/25/35mm	
Lead Wire Size	AWG28# silver plated copper UL <sup>®</sup> , Teflon <sup>®</sup>	Remarks		
Environment		Remarks		
Working Temperature	-20°C~+60°C	Application	/	
Working Humidity	$\leq 60\%RH$	Other	/	
Protection Class	IP40	Note: "P" stands for power, "S" stands for signal.		

 <b>JINPAT</b> <a href="http://www.slipring.cn">www.slipring.cn</a>	MODEL	LPMS-04C-03				
	Customer code	JP19-014-15HW	TITLE	Wiring Diagram		
UNIT	mm	TOL UNLESS SPECIFIED LINEAR 0--18 ±0.1 >18--80 ±0.15 >80--250 ±0.2 ANGLE x ±0.5°	DESIGN	LCC	DATE	2020.04.10
SCALE	1:1		CHECKED	CJS	DATE	2020.04.10
PROJ.		REV.	A0	PAGE	1/1	